

SUPERWAX mini

15" two-way active loudspeaker




Pitt & Giblin

TECHNICAL SPECIFICATIONS

TYPE:	TWO-WAY BASS REFLEX ACTIVE LOUDSPEAKER
DRIVERS:	15" PAPER CONE NEODYMIUM WOOFER + 1" TITANIUM COMPRESSION DRIVER
CABINET:	BLACKBUTT VENEER BIRCH PLY ETC
WAVEGUIDE:	CONSTANT DIRECTIVITY, SOLID CAST BRONZE
DSP: / AMPLIFIER:	HYPLEX FA123 - DLCP DSP + N CORE AMPLIFICATION
MAINS POWER:	120 - 240VAC, 50 - 60HZ, IEC
MAXIMUM SPL:	116dB @ 1m
FREQUENCY RESPONSE:	45-20,000 Hz, ±1dB (natural) / 30-20,000 Hz, ±1dB (extended LF)
BASS EXTENSION:	35 Hz (NATURAL) / 22 Hz (EXTENDED LF) @ -10 dB
CROSSOVER:	900 Hz
CONTROL:	MULTI-FUNCTION IR REMOTE
INPUTS (ANALOGUE):	MONO BALANCED XLR, MONO UNBALANCED RCA
INPUTS (DIGITAL):	AES3, SPDIF - COAXIAL, SPDIF - TOSLINK
PASSTHROUGH:	SPDIF - COAXIAL (DIGITAL LINK), AES3, MONO BALANCED XLR
DIMENSIONS (WxHxD):	460 x 715 x 380 [mm] - WITHOUT STAND
WEIGHT:	32kg



HORIZONTAL FREQUENCY RESPONSE:

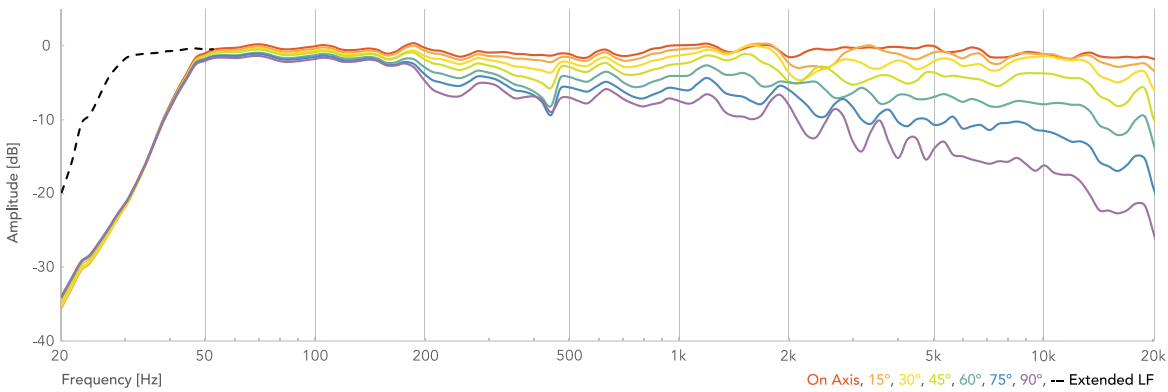

EXTENDED LF

An extended bass preset is included to maximise the low frequency extension beyond 35Hz.

This results in slightly reduced output capacity.

